



When You Think !!!

Safety. Power and Technology

Think Complete Quality


Think ADDONIX



ABOUT US

We incepted in the year 2007.our wide engineering and industrial experience helped us to step into the field of power electronics.we know the requirement of the industry we, addonix India, going to print its benchmarks in manufacturers & suppliers of high quality LED industrial signalling equipment, industrial siren & hooters, industrial LED road safety equipment, industrial railways signalling products, LED street light, LED flood light, our products are high on every aspect of quality, performance and reliability.

We are outfitted with latest cutting edge technology machines, which are manned by well trained manpower to develop and design a best range of products for our valued clients. Our expertise in developing latest solutions as per exact requirements of the clients further provides us a leading edge over the other players operating in similar arena.we are well supported experienced by experts from the fields of technology, design and market analysis.

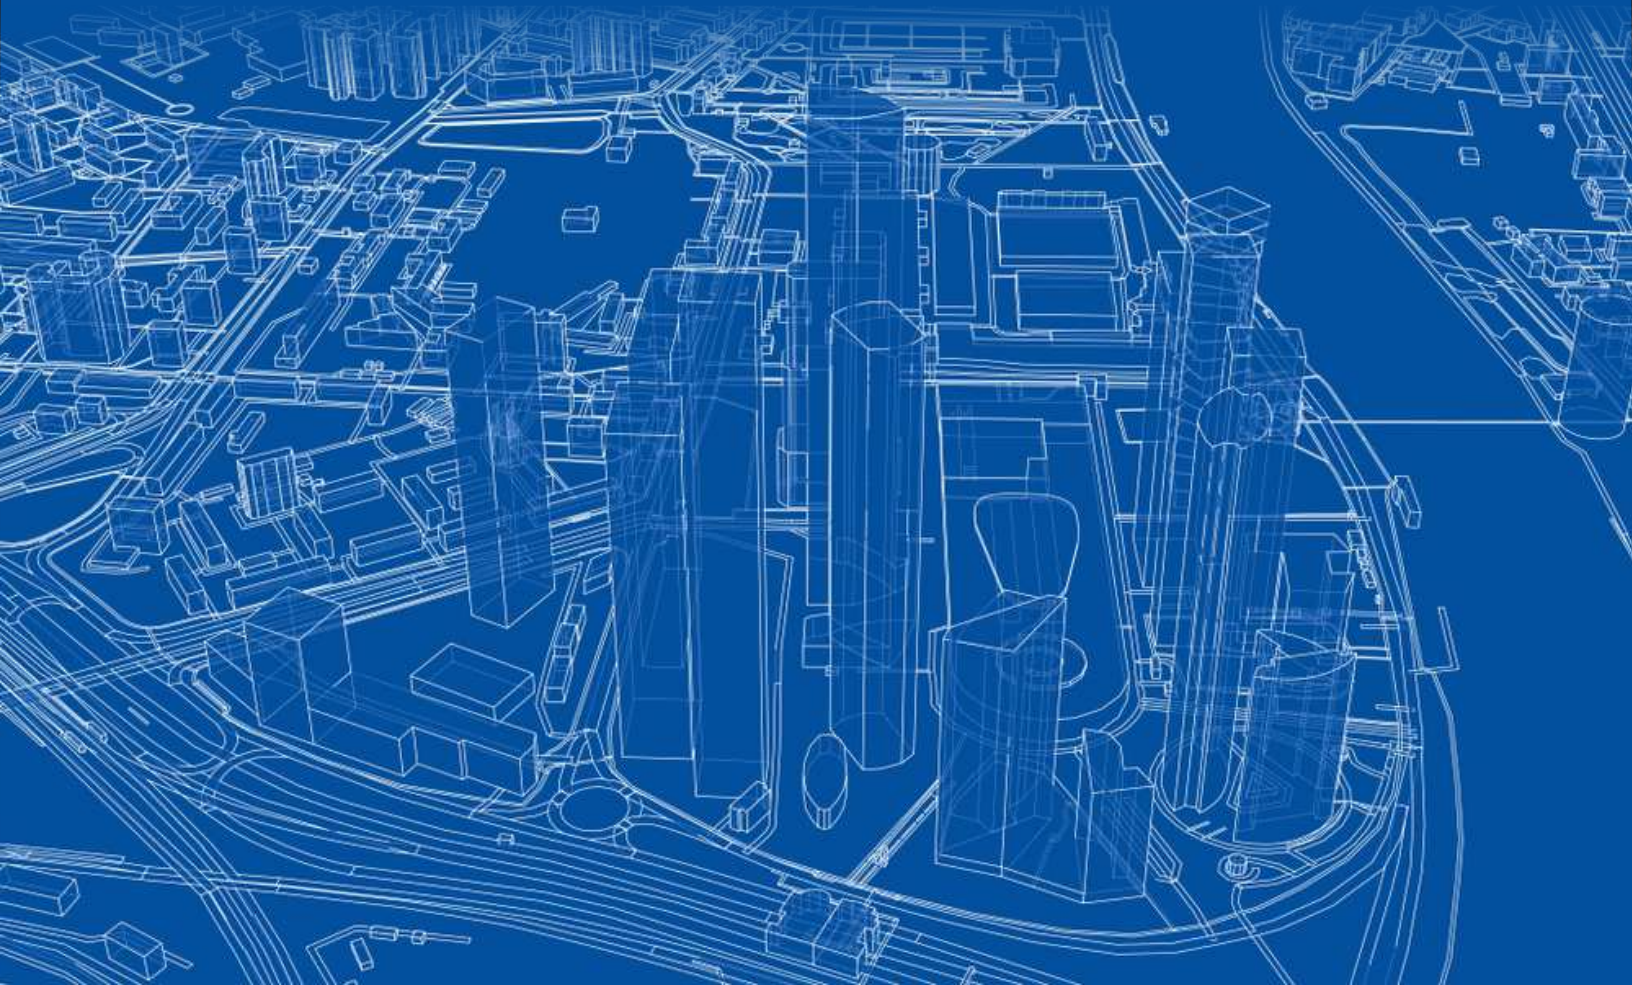

1. Audio Visual Alarm

Specification

■ Voltage	: 230 V AC,	■ Visibility Range	: 500 mtr.
■ Housing	: Acrylonitrile Butadiene Styrene	■ Weight	: 2.5 Kg
■ Audible Intensity	: 100 DB Approx.	■ Temperature	: (-25° to +55° cel.)
■ Mounting	: Base/wall	■ Model No	: AFHL-60
■ Protection	: Weatherproof	■ HSN Code	: 8531
■ Type	: LED with flasher	■ Sound	: Diametrical
■ Color	: LED	■ Sound	: Single Tone
■ Sound	: 110db	■ Source of light	: Clusters
■ Audible Range	: (200-300) mtr.	■ Frequency	: 500-1500Hz
		■ Viewing Angle	: 360° Degree



2. Flasher Light

Specification

■ Voltage	: 220/110 VAC
■ Flasher Colour	: Red
■ Power Input	: 40watt
■ Range	: 500mtr.
■ Sound	: 100DB
■ Mounting	: Base/Wall
■ Protection	: Weather Proof
■ Housing	: Acrylonitrile Butadiene Styrene
■ Make	: ADDONIX
■ Model	: ALFA-220
■ HSN CODE	: 8531



3. DSL Indicator

Specification

■ No Of Leds	: (50 x 3) pcs
■ Colour Of Led	: According To Requirement (r/y/b/g)
■ Operating Voltage	: 220/440 V AC, 50-60hz
■ Colour Of Body	: Black
■ Energy Consumption	: 3watt
■ Make	: ADDONIX
■ Model No	: ADX-RA-50
■ Hsn Code	: 8531
■ Advance Smpls For Constant Current Supply	
■ Economical Price	
■ 180 Degree Viewing Angle	



4. TOWER LIGHT

Specification

- TYPE : LED
- Colour : RED, GREEN, YELLOW
- Voltage : 12/24/110/220 VAC (AS PER REQUIRMENT)
- Housing : LENS POLYCARBONATE
- Protection : Ip65 (DUST PROOF/ WEATHER PROOF)
- Mounting : WALL/PANEL
- Make : ADDONIX
- MODEL NO : ASLT-L4
- HSN CODE : 8531



5. Siren with LED Revolving Light

Specification

- | | |
|---|---|
| ▪ Voltage : 220/110/24/12 | ▪ Weight : 2.5 Kg |
| ▪ Housing : Acrylonitrile Butadiene styrene | ▪ Temperature : (-25° to +55° cel.) |
| ▪ Audible Intensity : 90 DB Approx. | ▪ Model No : AAVA-220 |
| ▪ Mounting : Base/wall | ▪ HSN Code : 8531 |
| ▪ Protection : Weatherproof | ▪ Sound : Diametrical |
| ▪ Type : LED with flasher | ▪ Sound : Multiple |
| ▪ Color : YELLOW | ▪ Source of light : Clusters of LED |
| ▪ Audible range : 500 mtr. | ▪ Frequency : 500-1500Hz. |
| ▪ Visibility range : 500 mtr. | ▪ Operation : Continuous run up to 30 Minutes |



6. Siren with LED Revolving Light

Specification

- | | |
|---|-------------------------------------|
| ▪ Voltage : 230 V AC | ▪ Weight : 2.5 Kg |
| ▪ Housing : Acrylonitrile Butadiene styrene | ▪ Temperature : (-25° to +55° cel.) |
| ▪ Audible Intensity : 100 DB Approx. | ▪ Model No : AAVA-54A |
| ▪ Mounting : Base/wall | ▪ HSN Code : 8531 |
| ▪ Protection : Weatherproof | ▪ Sound : Diametrical |
| ▪ Type : LED with flasher | ▪ Sound : Single Tone |
| ▪ Color : RED | ▪ Source of light : Clusters of LED |
| ▪ Sound : 110db | ▪ Frequency : 500-1500Hz |
| ▪ Audible range : (200 -300) mtr. | ▪ Viewing Angle : 360° Degree |
| ▪ Visibility range : 500 mtr. | |



7. Aviation Light

Specification

- Medium Intensity LED Aviation Obstruction Light, (Heavy Duty Type)
- LED Color : RED
- LED Type : 5mm clear High Lumen
- Casing : Die Cast ALUMINIUM
- (Allow)LM 6 : Epoxy Power Coated
- Power Consume Max : 35W
- body color : Yellow
- intensity : 2000cd +25% (D & N), 2000cd, IP-65Hz, Flashing-20-60fpm, AS per ICAO Standards, ADDONIX
- M.NO : AVPSF360, (HSN CODE- 8531)



8. Horizontal Double Mount

Specification

- Phase : Three Phase
- Voltage : 400/440 AC
- HP : 3Hp
- RPM : 2800RPM
- Range : 5Km.
- Body : Aluminium Die Casting
- Winding : 100% Copper Wire
- Weight : 49Kg.
- Make : ADDONIX
- Model : AEHD-24500
- HSN CODE : 8531



9. Horizontal Single Mount

Specification

- Voltage : 220//250 AC
- Phase : Single Phase
- HP : 1/10Hp
- RPM : 6000RPM 50 C/S AC/DC
(Also available in 110/440V AC)
- Winding : 100% Copper
- Range : 1.0Km.
- Make : ADDONIX
- Model : AEHS-6100



10. Horizontal Heavy Duty

Specification

- Phase : Single Phase
- Voltage : 220/110 AC
- HP : 1/2Hp
- RPM : 2800RPM
- Range : 2.0 Km.
- Body : Aluminium Die Casting
- Winding : 100% Copper Wire
- Make : ADDONIX
- Model : AEPS-2200
- HSN CODE : 8531



11. Vertical Single Mount

Specification

- Phase : Three Phase
- Voltage : 220/110 AC
- HP : 1/4Hp
- RPM : 2800RPM
- Range : 500mtr.
- Winding : 100% Copper Wire
- Make : ADDONIX
- Model : AEVS-2050
- HSN CODE : 8531



12. Electronic Hooters

Specification

- Voltage : 220/250V AC
- Power : 50Hz
- Audio Output : 50watt
- Sound : 100db
- Sound Type : Single Tone
- Operating temp. : 30-50 Degree
- Audible Frequency : 540Hz to 1800Hz
- Audible range : Up to 500mtr
- Protection : Ip65
- Make : ADDONIX
- Model : AEST-050
- HSN : 8531



13. Pre-Recorded Siren

Specification

- | | | | |
|---------------------|---|--------------|-------------|
| ■ Voltage | : 220/250V AC | ■ Protection | : Ip65 |
| ■ Power | : 50Hz | ■ Make | : ADDONIX |
| ■ Audio Output | : 50watt | ■ Model | : APRS-S050 |
| ■ Sound | : 100db | ■ HSN | : 8531 |
| ■ Operating temp. | : 30-50 Degree | | |
| ■ Audible Frequency | : 540Hz to 1800Hz | | |
| ■ Mounting | : Wall/Panel | | |
| ■ Audible range | : Up to 500mtr | | |
| ■ Safety Message | : As per user instruction
(E.g. Crane aa rahe hai duri banaye rakhe) | | |



14. Traffic Light

Specification

- | | |
|-------------|--------------------------|
| ■ Lamp Type | : LED cluster |
| ■ Voltage | : 220/110/24/12 V AC |
| ■ Color | : RED/GREEN/YELLOW/BLUE |
| ■ Dia. | : (100/200/300)mm |
| ■ Duty Type | : Heavy |
| ■ Housing | : Weatherproof |
| ■ Mounting | : Pole Mount/ Wall Mount |
| ■ Body | : Poly carbonate |
| ■ Lense | : Acrylic |
| ■ Model No | : AT LX-100 |
| ■ HSN CODE | : 8531 |



15. Wagon Indicator

Specification

- | | |
|------------------------|------------------------|
| ■ Available Model- | : AAVI-G5 |
| ■ Audio Visual Alarm | |
| ■ Rechargeable Type | |
| ■ Operating Voltage | : 12/24/110/220V AC/DC |
| ■ Power Consume | : < 3W |
| ■ Visibility Distance | : 500Mtr |
| ■ Audiability Distance | : 500Mtr |
| ■ Sound intensity | : >150db |
| ■ Battery Back Up | : Up to 8Hrs |
| ■ LED Used | : 24Nos (RED) |
| ■ Wall/Pole Mount | |
| ■ Wheather proof | |
| ■ Eco Friendly | |



16. EXIT light

Specification

- Voltage : 220/110 VAC
- Supply : 50HZ
- LED : 20watt
- Type : Wall Mounting/
Surface Mounting
- Colour Of Text : RED
- Luminary : Double High Glow Led
Based Beam & Exit Sign
- Battery : Exide/Luminous 12V 7AH
maintenance free batteries
- Battery Backup : up to 4hrs on LED
- Indications : Mains ON and Fuse Blown
- HSN CODE : 8531




- Protection : Fuse Protection, Deep Discharge and
Battery Over Charge
- Body : White Corrosion Resistance Metal Housing
- Colour Of Body : White
- Make : ADDONIX
- Model No : AFEL-2G

17. Oxygen & Temp Display

Specification

- This Display Is Compatible With Digitemp, Multilab-2, Multilab-3, And Im Sensor Labof Heraeus Electronite.
- DISPLAY : 4-digit Ultra-bright Led Display With Unreflective Filter Glass
- DIGIT HEIGHT : 200mm
- LAMP TEST : All Segment And Decimal Points (dp) Light Up For 2 Seconds After Switching On.
- HOUSING : STEEL HOUSING FOR STEEL MOUNTING
- PROTECTION : IP 65
- DIMENSION : 600mm x 300mm x 120mm
- DATA INPUT : TTY20Ma-current loop serial
- SERIAL INPUT : MODE OF TRANSMISSION : Interface, Tty 20ma-current Loop, Passive
TRANSMISSION MEDIUM : 2-wire cable, twisted
TRANSMISSION RATE : 300/600/1200/2400 baud (adjustable)
CHARACTER FRAME : 1 Startbit, 7 Datatats, 1 Paritybit (even), 1 Stopbit
- READING DISTANCE : UPTO 50mtr.
- AMBIENT TEMPERATURE : 0 TO +50°C
- WEIGHT : 11Kg
- POWER SUPPLY VOLTAGE : 110/220 VAC

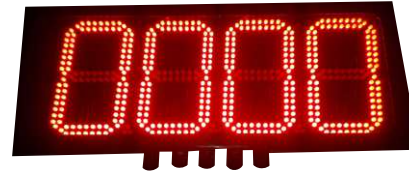

18. Running Display

Specification

- Type : DIGITAL LED
- DISPLAY RESOLUTION : 10000 (DOTS)/ MM2
- DISPLAY DIMENSION : (6 x 4) FT
- SPECIAL FEATURES : MOVING MESSAGE
- SPECIFICATION : ONLINE REAL TIME
- LETTER SIZE : DOUBLE LINE & DIGIT 4 INCH TO 10 INCH
- VISIABILITY : 80-100 METERS
- READABILITY : UPTO 60 METERS
- MAKE : ADDONIX
- MODEL NO : ADX-DR64
- HSN CODE : 8531



19. FLAMEPROOF AUDIO VISUAL ALARM

Specification

■ Classification	:	Group II, Category 2 GD; Class I, Division 1 and 2, Group A,B,C,D
■ IP Degree	:	IP65
■ Corrosion Resistance	:	WFI
■ Input Voltage	:	AC220V/DC24V/DC36V
■ Power	:	5W
■ Sound Strength	:	90DB
■ Color	:	Red, Yellow, Blue, Green
■ Emergency Start Time	:	<0.3s
■ Conduit Entries	:	G ¾"
■ Mounting Styles	:	Base; Stanchion
■ Net Weight	:	2.7kg
■ Housing	:	Aluminum Die Casting
■ Exterior	:	Stainless Steel
■ Globe	:	Tempered glass
■ Gasket	:	Silicon Rubber
■ Make	:	ADDONIX
■ Model No.	:	AFEX-90D




Specification

■ Classification	:	Group II, Category 2 GD; Class I, Division 1 and 2, Group A,B,C,D
■ IP Degree	:	IP65
■ Corrosion Resistance	:	WFI
■ Input Voltage	:	AC220V/DC24V/DC36V
■ Power	:	15W
■ Sound Strength	:	120DB
■ Color	:	Red, Yellow, Blue, Green
■ Emergency Start Time	:	<0.3s
■ Conduit Entries	:	G ¾"
■ Mounting Styles	:	Base; Stanchion
■ Net Weight	:	2.7kg
■ Housing	:	Aluminum Die Casting
■ Exterior	:	Stainless Steel
■ Globe	:	Tempered glass
■ Gasket	:	Silicon Rubber
■ Make	:	ADDONIX
■ Model No.	:	AFEX-120D



Specification

■ Classification	:	Group II, Category 2 GD; Class I, Division 1 and 2, Group A,B,C,D
■ IP Degree	:	IP65
■ Corrosion Resistance	:	WFI
■ Input Voltage	:	AC220V/DC24V/DC36V
■ Power	:	20W
■ Sound Strength	:	180DB
■ Color	:	Red, Yellow, Blue, Green
■ Emergency Start Time	:	<0.3s
■ Conduit Entries	:	G ¾"
■ Mounting Styles	:	Base; Stanchion
■ Net Weight	:	3.2kg
■ Housing	:	Aluminum Die Casting
■ Exterior	:	Stainless Steel
■ Globe	:	Tempered glass
■ Gasket	:	Silicon Rubber
■ Make	:	ADDONIX
■ Model No.	:	AFEX-180D

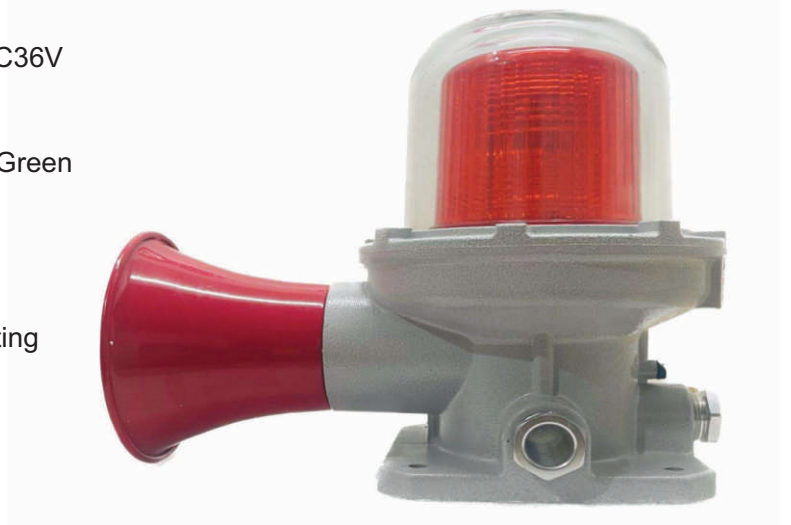

Our Client





Industrial Sirens | Hooters | Audio Visual Alarms



HD-7, Duplex Market Complex, Near BSNL Office,
Chhend, Rourkela-769 015 (Odisha) INDIA

Ph. : 0661-6536524

Mob. : +91 98610 43008 / +91 90400 43009

E-mail : sales@addonix.in

Website : www.addonix.in



Click Here

